

T Series AHD/TVI/CVI/CVBS HD Camera

OTD-T4610



| | |
|---------------|---|
| Series | T Series 2MP, AHD / TVI / CVI / CVBS, HD, 2.8mm Fixed Lens, Digital WDR, Dome Type |
|---------------|---|

Camera

| | |
|---------------------------|--|
| Image Sensor | 1 / 2.9 "CMOS |
| Resolution | 2MP |
| Image Size | 1920 x 1080 |
| Video Output | AHD / TVI / CVI / CVBS |
| Image System | PAL / NTSC |
| Electronic Shutter | Auto; 1 / 50s ~ 1 / 100000s (PAL); 1 / 60s ~ 1 / 100000s (NTSC) |
| IR Distance | 10 ~ 20 m |
| Frame Rate | 30fps (60Hz), 25fps (50Hz) |
| Min. Illumination | 0 Lux (IR ON) |
| Lens | 2.8 mm |
| Lens Mount | M12 |
| S / N Ratio | >=52dB (AGC OFF) |
| Ingress Protection | IP66 |


Functions

| | |
|---------------------------------|---------------------|
| Function Control | OSD (COC Control) |
| Day & Night | ICR |
| Digital WDR | Yes |
| Digital NR | Yes |
| Global Exposure | Yes |
| Central Exposure | Yes |
| AGC | Yes |
| Auto White Balance | Yes |
| BLC | Yes |
| Front Light Compensation | Yes |
| Sharpness | Yes |
| Smart IR | Yes |
| Image Setting | Yes |
| Defect Correction | Auto |
| Language | Chinese / English |
| Angle Adjustment | Any angle |

Others

| | |
|----------------------------|--|
| Power Supply | DC12V (± 10%) |
| Power Consumption | Day : < 1W; Night : < 4W |
| Working Environment | - 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity) |
| Dimensions (mm) | Ø87 x 108 |

2 MP AHD/TVI/CVI/CVBS HD IR Dome Camera

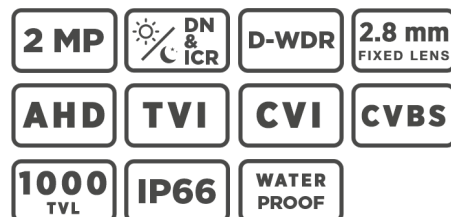

- * 1080P real time image, high resolution, true color
- * AHD/TVI/CVI/CVBS lossless video output
- * Up to 1000 TVL resolution
- * CMOS progressive scan, perfectly capture the moving object
- * Support OSD menu
- * High speed, long distance, real time transmission
- * Auto color to B / W at low illumination
- * Support ICR switch, true day / night
- * Support noise reduction function
- * 10 ~ 20m IR night view distance
- * IP66 ingress protection
- * Support COC
- * Support 960H CVBS output

