


## X Series IP Camera


# ONP-X47301-RH



### 30x Zoom 3 MP Network IR HD High Speed Dome Camera

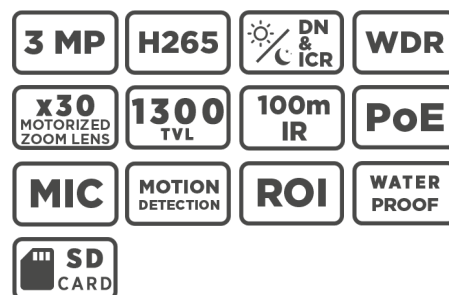

- \* 1 / 2.8" CMOS progressive scan, 30 optical zoom
- \* HD network video output : 2048 1536 @25 / 30fps
- \* H.265 image compression format
- \* TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
- \* SD card local storage, network remote storage
- \* Web GUI Menu
- \* Support selected area amplification and PTZ function
- \* Provide standard SDK, easy to integrate with other digital system
- \* IP66 ingress protection; TVS 6KV lightning protection, surge protection
- \* 100m IR night view distance

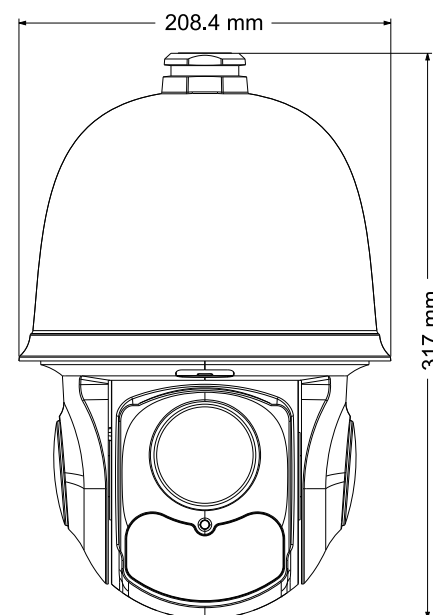

Series	X Series 3 MP, H.265, 30x Zoom ,120dB WDR, High Speed Dome Type
--------	--

#### Camera

Image Sensor	1 / 2.8" Progressive CMOS
Effective Pixels	2048 x 1536
Horizontal Resolution	1300 TVL
Min. Illumination	0 Lux
IR Distance	100 m
White Balance	Auto / Manual
WDR	120dB
S / N Ratio	Max 48dB
Day & Night	Auto / Manual
Focus Mode	Auto / Manual
Lens	30x Zoom, f = 4.5 ~ 135 mm, F1.6 ~ F4.4

#### PTZ

Pan Range	360° endless rotation
Pan Speed	Preset speed : 150 %/s; Manual control speed : 0.5 ~ 80 %/s
Tilt Range	0 ~ 93° ( auto rotation )
Tilt Speed	Preset speed : 120 %/s; Manual control speed : 0.5 ~ 70 %/s

#### System

PTZ Control	Yes
Preset	360
Cruise	8
Track	4
Time Task	8
Scan	2
Home Position	Yes
Auto Flip	Yes
OSD Menu	English
Alarm Input	1
Alarm Output	1
Alarm Linkage	Yes

#### Network

Compression	H.265
Frame Rate	1 ~ 30fps ( 25 fps )
Protocol	TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
Storage	SD card local storage, network remote storage
Smart Alarm	Motion Alarm, Sensor Alarm
Resolution	3MP (2048 1536 ), 1080P ( 1920 1080 ), 720P ( 1280 x 720 ), D1, CIF, 480 x 240
Multi-stream	Yes

#### Port

Network Interface	10 Base-T / 100 Base-TX, RJ45
Audio	MIC input x 1, MIC output x 1

#### Others

Control	Network
Power Supply	DC 24V / 2500 mA
Power Consumption	15 W ( max 30W, IR on )
Working Environment	Temperature : - 30 °C ~ 60 °C; Humidity : less than 95%
Protection Level	IP66; TVS 6KV lightning protection, surge protection
Weight ( net )	3.77KG
Gross Weight	5.84KG(without bracket)
Dimensions ( mm )	Ø209 x 317